

FIG.1  
(CONVENTIONAL ART)

2/15


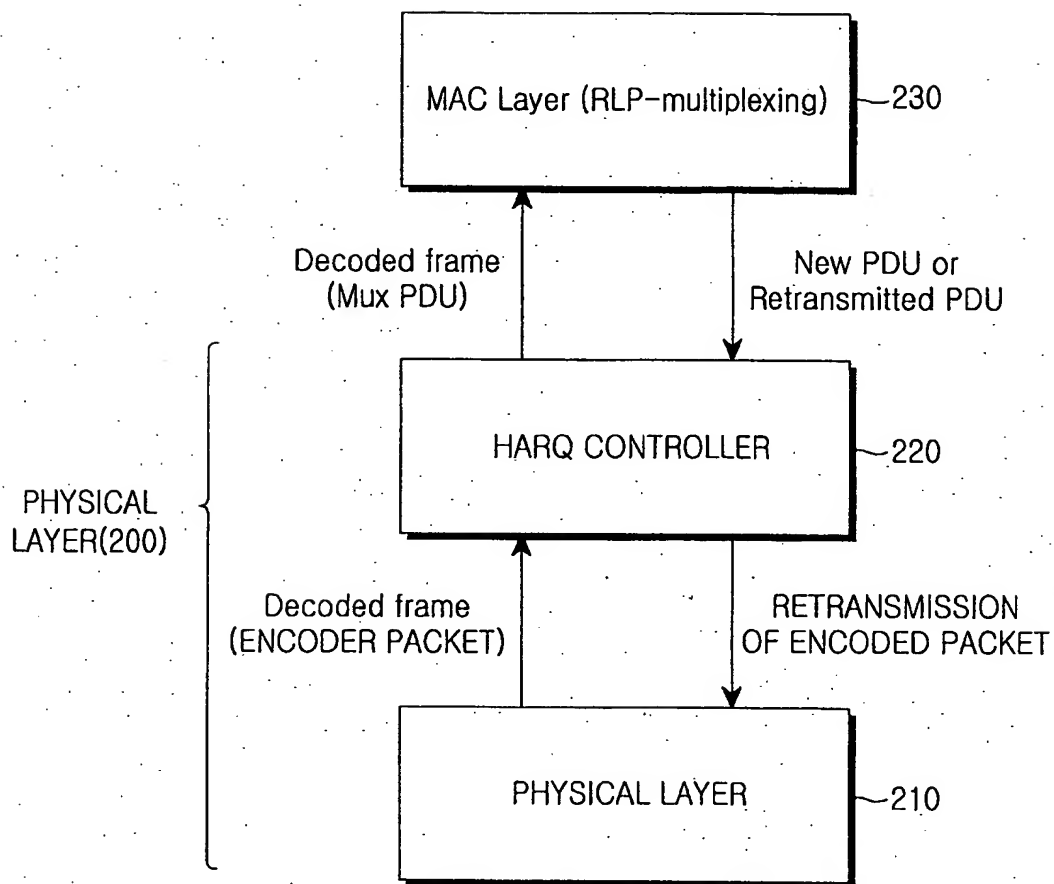



FIG.2  
(RELATED ART)

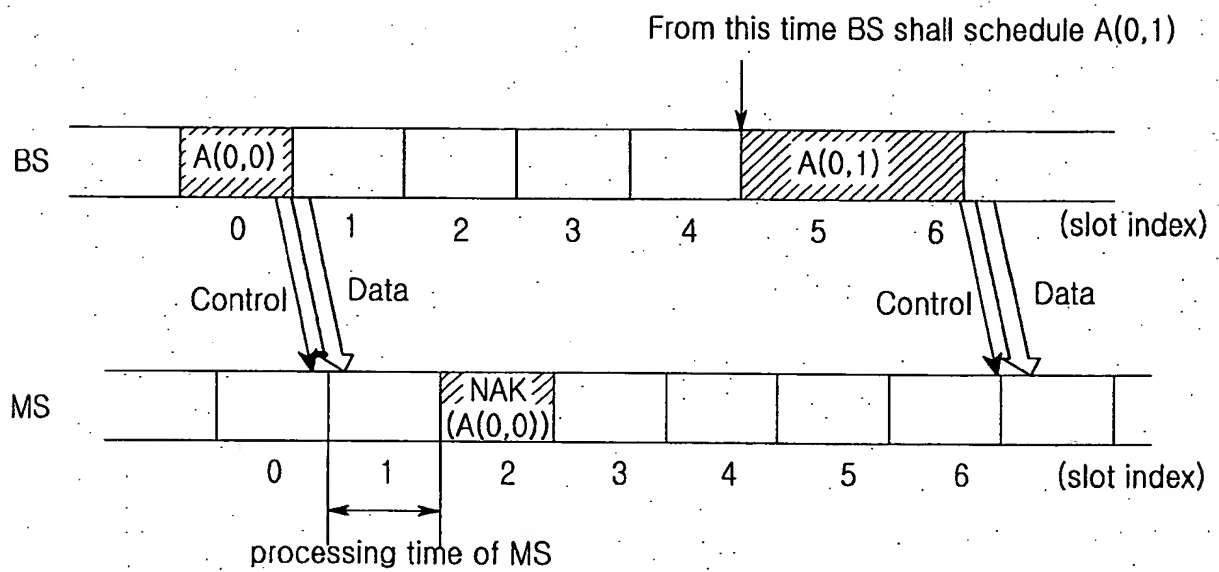

$A(x,y)$ =Mobile station 'A'  
ARQ instance(ACID)'x'  
Subpacket ID(SPID)'y'

FIG.3  
(CONVENTIONAL ART)

4/15

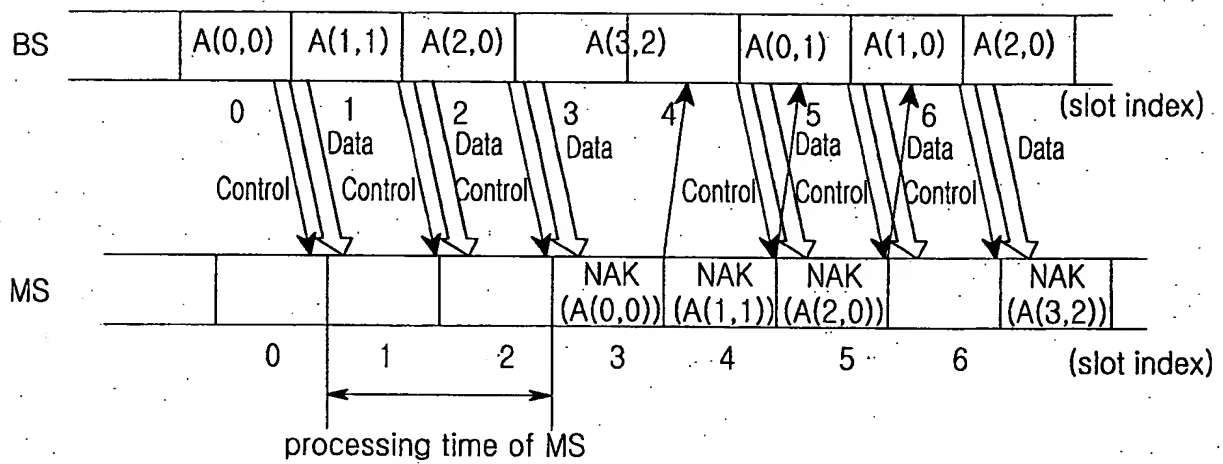

A(x,y)=Mobile station 'A'  
 ARQ instance(ACID)'x'  
 Subpacket ID(SPID)'y'

FIG.4  
 (CONVENTIONAL ART)